

To guard against accidentally leaving the power on, unplug the power cable from the power module when not in use. **DO NOT ATTEMPT TO POWER THE S-ARH DIRECTLY FROM YOUR AIRCRAFT** electrical system without using our panel mount power system. This system will give clean stable power to the S-ARH.

### CLEANING

Headset parts may be cleaned with mild soap on a soft damp cloth. Then dry immediately. **CAUTION: Do NOT** immerse any part of the headset in water or any other liquid. Be especially careful not to allow the microphone to become wet! Exposure to moisture may cause internal corrosion and failure and will void your manufacturers warranty.

Cleaning will help the headset maintain its "like new " condition for many years.

### WINDSCREEN

The microphone windscreen will reduce annoying wind noise and breath pops picked up by headset microphones. It also protects the microphone element from dirt and moisture. The windscreen should be washed regularly to maintain hygiene and avoid clogging. Wash in warm water and mild soap. Rinse thoroughly and make sure it is completely dry before putting it back on.

To remove the windscreen, carefully grasp the windscreen lightly along its entire length and remove from the microphone element being careful not to twist the element itself.

Put the windscreen on the microphone by gently pulling from the open end. Do not pull it so tightly that it stretches against the end of the microphone.

### WARRANTY

Your headset is covered by a limited three-year parts and labor warranty. Please see the enclosed warranty card for details.

You may refer to the parts list on the reverse side, if you choose to replace parts yourself. The parts list describes parts for this particular headset only. Parts lists for other models are available on our Web Site or can be obtained by contacting Sigtronics Corporation.



Sigtronics Corporation  
178 East Arrow Highway  
San Dimas, CA 91773  
**Phone:** 909 305-9399  
**E-mail:** info@sigtronics.com  
**Web Site:** www.sigtronics.com

## Model S-ARH Headset Instructions

The S-ARH series headsets are adjusted at the factory for immediate use with all standard general aviation radio systems utilizing the U174/U jack. Headsets are equipped with a single volume control, coiled cord and a U174/U plug (mono only).


The headband is adjustable through a full range of adult sizes, or the locking nuts may be tightened to allow you to custom fit the headset. Place the headset over your head, adjust the slides up until minimum pressure is felt on the top of your head. The headset is now properly adjusted. For maximum noise attenuation, the clamping pressure has been set at the factory. Releasing the clamping pressure by bending the headband is not advised, because loss of attenuation will result. **Note:** If especially small (youth size) or large headbands are needed, they may be ordered from Sigtronics.

The microphone boom is fully adjustable and will rotate 180 degrees. For best results use with the microphone on the left side of the head. **Make sure you are speaking into the side of the mic labeled "Talk" or substantial loss of gain will occur. Microphone placement should be at the corner of the mouth, approximately 1/4" from the lips.** Sigtronics ultra-deep gel ear seals will provide for best performance. Do not insert any material into the ear cups.

When you **first connect the headset**, make sure the S-ARH power plug securely fastened to the battery box power jack and push the power switch to the "ON" position. Turn volume control on the headset up to maximum volume (the full clockwise position). Adjust the listening volume with the audio control of either your radio or intercom as appropriate. Passengers should also turn their individual headset volumes up fully. Doing this allows for a full range of adjustment for each passenger, since those with the most acute hearing can turn their headset volume down, if necessary.

Test the headset in the "ON" and "OFF" modes on the ramp prior to take off. If there is a problem in the "ON" position then use in the "OFF" position. The S-ARH is completely fail-safe and will continue to work even if power to the headset is lost. If the power to the headset is unstable, simply turn off power and use headset in the "OFF" position. The S-ARH performs best when using high quality Alkaline batteries. The life of these high quality batteries should last 20 hours minimum.

continued on back...

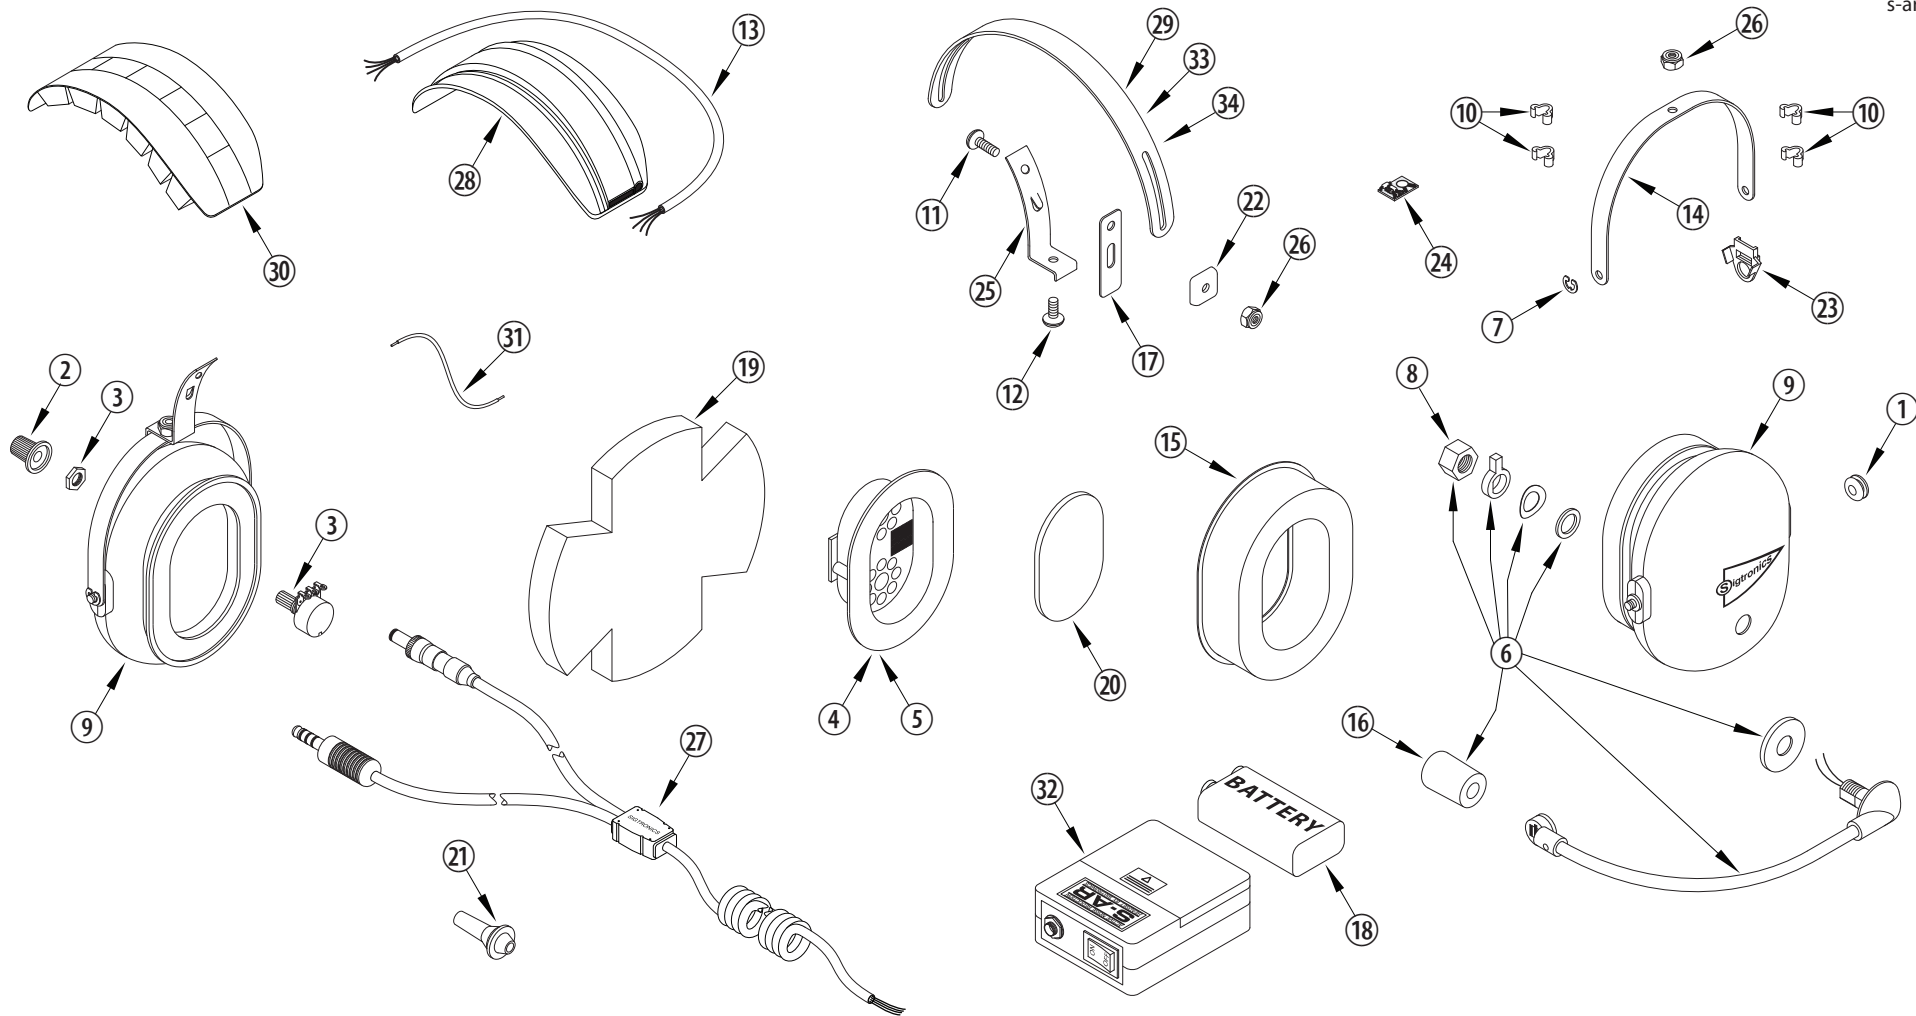

**SIGTRONICS S-ARH HEADSET PARTS IDENTIFICATION BREAKDOWN**

ITEM	P/N	DESCRIPTION	ITEM	P/N	DESCRIPTION	ITEM	P/N	DESCRIPTION
1	100049	GROMMET, 5/16 INCH, RUBBER	13	100679	WIRE, 4 CONDUCTOR, 28.5 INCHES	25	100604	BRACKET, YOKE SUPPORT WITH TANG, BLACK
2	100360	KNOB, BLACK, VOLUME	14	100603	YOKE, EAR CUP MOUNT, METAL, BLACK	26	100252	NUT, HEX, 8-32, LOCKING
3	100365	POTENTIOMETER, 2K	15	100686	EAR SEAL, GEL / FOAM FILLED	27	800113	CABLE, HEADSET, MONAURAL, COILED
4	100754	RECEIVER MODULE — VOLUME SIDE	16	900111	WINDSCREEN, MIC, 8 SERIES	28	100687	HEAD BAND EXTRUSION, 6.25 IN., S-AR
5	100755	RECEIVER MODULE — MICROPHONE SIDE	17	100373	SLIDE, YOKE BRACKET, LONG, NYLON	29	100602	HEADBAND, METAL, BLACK, STANDARD
6	800193	MICROPHONE & FLEX BOOM ASSEMBLY	18	100179	BATTERY, 9 VOLT	30	100610	CUSHION, HEADBAND, FOAM FILLED
7	100251	E-RING, EAR CUP TO YOKE RETAINER	19	100684	FOAM, SOUND ATTENUATING	31	100221	WIRE, JUMPER, #22, 4 INCHES
8	100597	NUT, HEX, 3/8-24, FLEX BOOM ADAPTER	20	100685	SOUND ATTENUATING, RECEIVER COVER	32	800114	POWER MODULE, BATTERY
9	100683	EAR CUP, PRINTED AND DRILLED, MIC & NON MIC SIDE	21	100569	STRAIN RELIEF, CABLE	33	100613	OPTIONAL – HEADBAND, METAL, BLACK, LARGE
10	100362	CLIP, CROSS-OVER, WIRE, PLASTIC	22	100258	CLIP, HEADBAND GUIDE, PLASTIC	34	100672	OPTIONAL – HEADBAND, METAL, BLACK, YOUTH
11	100363	SCREW, 8-32 X 1/2, PHILLIPS HEAD	23	100393	CLIP, ANTI-ROTATION, YOKE, PLASTIC			
12	100364	SCREW, 8-32 X 3/8, PHILLIPS HEAD	24	800192	PREAMP			