

The headphone parts may be cleaned with mild soap and water using a soft cloth. Then dry immediately. **Caution: Do Not immerse** any part of the headphone in water or any other liquid. Exposure to moisture may cause internal corrosion and failure and will void your manufacturers warranty.

Cleaning will help the headphone maintain its "like new" condition for many years.

WARRANTY

Your headphone is covered by a limited one-year parts and labor warranty. Please see the enclosed warranty card for details.

You may refer to the parts list on the reverse side, if you choose to replace parts yourself. The parts list describes parts for this particular headphone only. Parts lists for other models are available on our Web Site or can be obtained by contacting Sigtronics Corporation.



Sigtronics Corporation
178 East Arrow Highway
San Dimas, CA 91773
Phone: 909 305-9399
E-mail: info@sigtronics.com
Web Site: www.sigtronics.com

Model SEH-2 Headphone Instructions

The SEH-2 series of headphones are adjusted at the factory for immediate use with all Sigtronics emergency apparatus intercoms and radio adapters in emergency vehicles. The headphone is equipped with a single plug and a coiled cord.


The head strap is adjustable so you may custom fit the headphone. Place the headphone over your head and adjust the strap until minimum pressure is felt on the top of your head. For maximum noise attenuation, the clamping pressure of the headband has been set at the factory. Releasing the clamping pressure by bending the headband is **not advised**, because loss of attenuation will result.

When you **first connect the headphone**, turn the volume control on the headphone up to the full clockwise position, then adjust the listening volume with the audio control of either your radio or intercom as appropriate. If applicable, crew members should also turn their individual headphone volumes up fully. Doing this allows for a full range of adjustment for each passenger, since those with the most acute hearing can turn their headphone volume down, if necessary.

continued on back...



...when it counts!

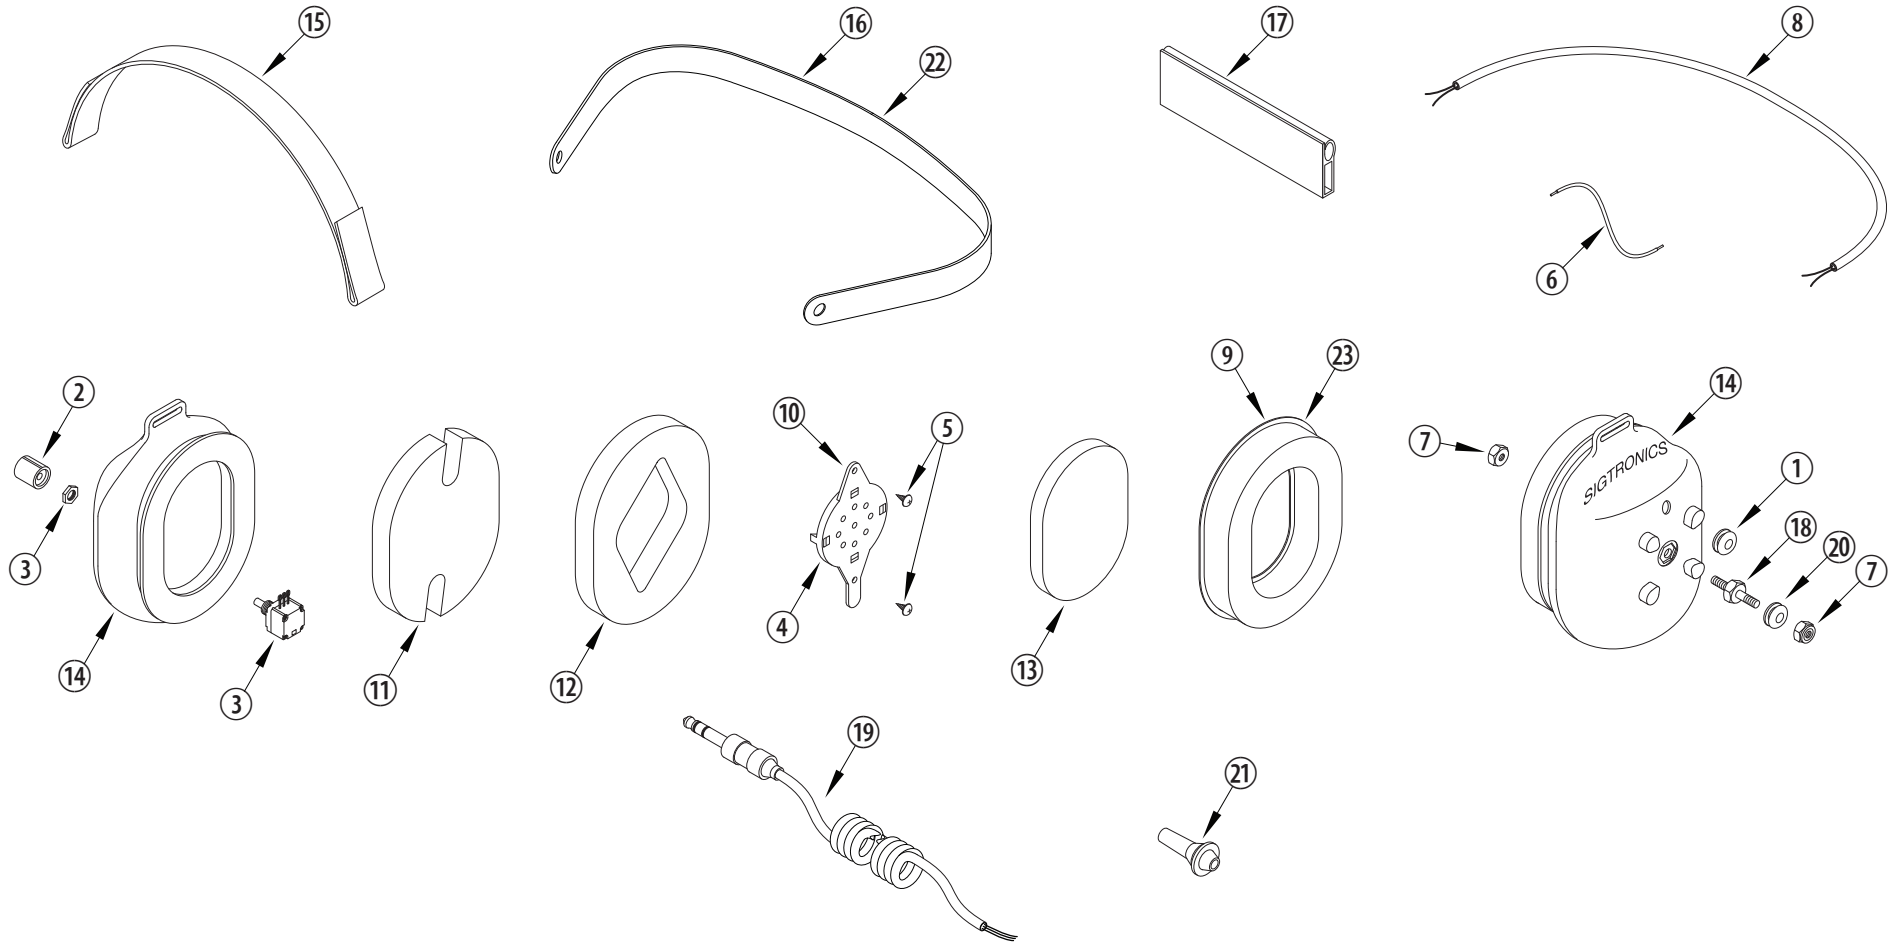

SIGTRONICS SEH-2 HEADPHONE PARTS IDENTIFICATION BREAKDOWN

ITEM	P/N	DESCRIPTION	ITEM	P/N	DESCRIPTION	ITEM	P/N	DESCRIPTION
1	100049	GROMMET, 5/16 INCH, RUBBER	9	100369	EAR SEAL, FOAM FILLED	17	100413	HEADBAND EXTRUSION, 4 IN., SE-2
2	100063	KNOB, 3/8 INCH, BLACK, VOLUME	10	100370	RECEIVER MOUNT, HEADSET	18	100451	STUD, SE-2, EAR CUP TO BAND MOUNT
3	100077	POTENTIOMETER	11	100374	FOAM, SOUND ATTENUATING. NOTCHED, 1/2 INCH	19	800035	CABLE, HEADSET, STEREO, COILED
4	100079	RECEIVER, 300 OHM, MONO	12	100376	FOAM, SOUND ATTENUATING. RECEIVER HOLE, 1/2 INCH	20	100567	GROMMET, SE-2 STUD
5	100108	SCREW, 4-40 X 1/4, THREAD FORMING	13	100379	FOAM, SOUND ATTENUATING, RECEIVER COVER, 1/4 INCH	21	100568	STRAIN RELIEF, CABLE
6	100221	WIRE, #22, 19 STRAND, 4 INCH	14	100409	EAR CUP, PRINTED AND DRILLED, MIC & NON MIC SIDE	22	100675	OPTIONAL - HEADBAND, METAL, BLACK, LARGE
7	100252	NUT, HEX, 8-32, LOCKING	15	100411	STRAP, HEADSET, SE-2, BLACK	23	100402	OPTIONAL - EAR SEAL, GEL FILLED
8	100366	WIRE, 2 CONDUCTOR, #24, BLACK, 22 INCHES	16	800220	HEADBAND, METAL, BLACK, WITH GROMMETS, SE-2			